

Tips of QP1R Firmware Upgrading Steps

QP1R can be updated via software upgrade that is placed on the TF card. Here are the directions:

- ① Insert the TF card into TF card 1 slot and format it via computer. As shown in Fig. 25, go to “File System-FAT32” and click “Start” to format the TF card.

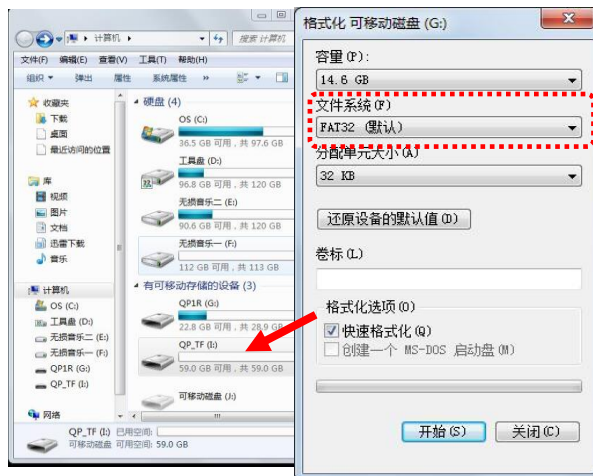


Fig. 25

- ② Download the latest firmware file from www.questyleaudio.com and copy it to the TF card.

NOTE: there should be no any other files copied into the TF card except the firmware file. If the firmware file is zipped package, you need to unzip it before copying to the TF card. The unzipped file name is”Q1.fw” which is not allowed to be changed, otherwise it will result in an upgrade failure.

- ③ Turn on QP1R and select the “System Settings - Upgrade - Yes”(See Fig. 26).



Fig. 26

- ④ Upgrade will succeed when the display shows “Update finish”.

NOTE: in the process of upgrading, do not operate QP1R and make sure QP1R battery is more than 30% in case of an upgrade failure caused by power-off during the upgrading process.

⑤After upgrade, QP1R will self-restart. You can view the firmware information via “System Settings-About QP1R”. If the upgraded firmware is not the latest version, please repeat the above directions; if the upgrade fails still, it could be a bug.

NOTE:

①Before formatting the TF card, please save all the files in QP1R internal memory and TF cards to avoid file loss.

②After the upgrade and self-restart, if the capacitive buttons are found to be ineffective, please restart QP1R manually and the problem can be solved then.